



**WIDELY USED FOR DOMESTIC FENCING, ESTATES, LIVE STOCK FARMS, SECURITY FORCES AND ON TOP OF BOUNDRY WALLS AND ON TOP OF CHAIN LINK FENCING FOR EXTRA SECURITY ETC.**

**Quality & Durability  
Trusted Since 1965**

# BARBED WIRE


## STANDARD SPECIFICATIONS

### GI BARBED WIRE

Diameter of GI Wire	Diameter With PVC Coating	Diameter of Point Wire	Maximum Distance Between Barbs	Minimum No. of Nodes Between Barbs	Weight
mm	mm	mm	mm	mm	KG
2.0	-	2	100	4	10 / 20 / 25

### PVC COATED BARBED WIRE

Diameter of GI Wire	Diameter With PVC Coating	Diameter of Point Wire	Maximum Distance Between Barbs	Minimum No. of Nodes Between Barbs	Weight
mm	mm	mm	mm	mm	KG
1.9	2.5	2	100	4	10 / 20

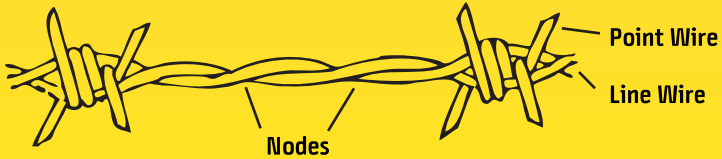

- The wire used in all Macson products are hot dipped galvanized.



SINCE 1965

## Macson Mesh Industries (Pvt) Ltd

304 Deans Road, Colombo 10, Sri Lanka Tel: +94 11 7437140, +94 11 2684848  
 Fax: +94 11 7437180 Email: info@macsonmesh.com Web: www.macsonmesh.com